

**Industrial Circular Connectors** 

# ROHS VERSIONS

- Black coating
- Nickel plating



Principally aimed at I/O applications, the SL61 connectors are available in 4 types of housing (10, 20, 30 and 40) and 26 arrangements from 2 to 61 mixed solder contacts. They are available in the following

- Plugs

- Receptacles
- Line mount receptacles
- Receptacles with locking ring

Connectors are made of aluminium alloy which provides them excellent reliability and robustness. When application requires greater performances, the sealing can be improved by the use of a sprayproofing sleeve.

# Robustness and reliability

Automation

- Instrumentation
- Robotics
- Power distribution
- Transport
- Entertainment (brand-lights)

 Closed entry female contacts Two parts backshell ensuring simple wiring and maintenance

Adaptable capacity cable clamp

Gold plated turned contacts

Reinforced locking ring

Trapezoidal thread screw-locking

Solder contacts

Please contact us for other contact terminations

- for crimping

- for soldering with earth protection

 Size 40 one piece backshell (please consult us)

Working temperature:

- 40°C / + 85°C

• Current capability: 7.5, 10, 25 and 50 Amps

Operating voltage: to 600 Volts

ROHS versions available

- black coating (non conductive)

- nickel plating (conductive)

• UL recognition n° E160967(01)

• Large selection of insert arrangements

Robust and reliable

Stock items




configurations:

**Amphenol** 

MAIN CHARACTERISTICS

#### **Contact arrangements**

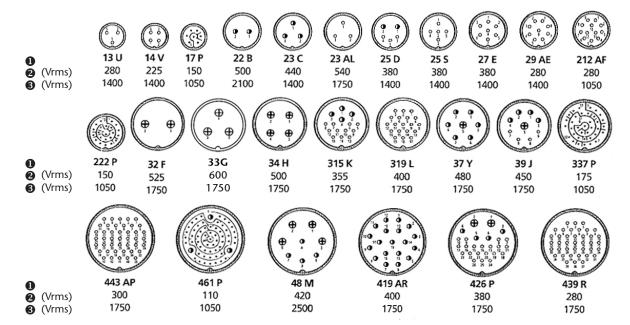

Contact arrangement

Working voltage

Test voltage at sea level

| Nominal current              | Contact resistance   | Maximum permissible wire dia.             |
|------------------------------|--|---|
| • 7,5 A ○ 10 A Φ 25 A ⊕ 50 A | $\leq$ 5 m $\Omega$<br>$\leq$ 2 m $\Omega$<br>$\leq$ 2 m $\Omega$<br>$\leq$ 2 m $\Omega$ | 0.75 mm²<br>1.75 mm²<br>5.1 mm²<br>13 mm² |


REMARK: the second and the third digit of the contact arrangements (if the third exists) indicate the number of contacts in the arrangement. Ex.: 426P = 26 contacts.

# Straight or right-angle backshell

|                   |                            |                                     | Backshel                | I reference |  |        |  |  |
|-------------------|----------------------------|-------------------------------------|-------------------------|-------------|--|--------|--|--|
| Connector<br>size | black*<br>(non conductive) | straight<br>nickel*<br>(conductive) | nickel*   green cadmium |             | right-angle   black*   nickel*   gre   (non conductive)   (conductive) |        |  |  |
| 10                | 47377N                     | 47377NI                             | 21458N                  | 47381N      | 47381NI  | 21462N |  |  |
| 20                | 47378N                     | 47378NI                             | 21459N                  | 47382N      | 47382NI  | 21463N |  |  |
| 30                | 47379N                     | 47379NI                             | 21460N                  | 47383N      | 47383NI  | 21464N |  |  |
| 40                | 47380N                     | 47380NI                             | 21461N                  | 47384N      | 47384NI  | 21465N |  |  |


- \* Black and Nickel backshells are ROHS compliant
- Straight or right-angle backshells are delivered with different clamping pads.
- Green backshells (conductive finish) are delivered with metallised clamping pads.


#### **Accessories**

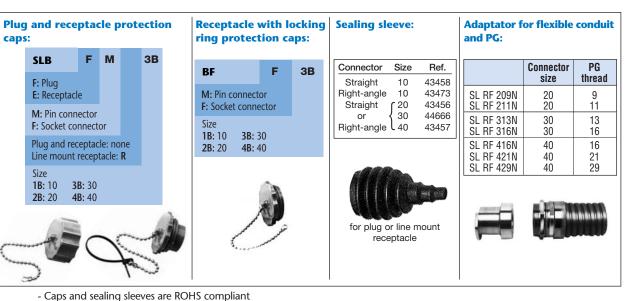

# Straight plug


Straight female plug






Right angle plug

Right-angle male plug



Right-angle female plug



| size | 0<br>ø A - 0,2<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) |       | G<br>(mm) |       | H<br>(mm) | J<br>(mm) | K<br>(mm) | L<br>(mm) | M<br>(mm) | N<br>(mm) | R<br>(mm) | S<br>(mm) | T<br>(mm) | W<br>(mm) | Y<br>(mm) |
|------|------------------------|-----------|-----------|-----------|-----------|-----------|-------|-----------|-------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 10   | 27.5                   | 61.9      | 52.9      | 47.9      | 45.5      | 38.9      | 5-7   | 7-9       |       | 57.4      | 48.4      | 21        | 53.5      | 57.9      | 24        | 4.5       | 16.5      | 3.2       | 19        | 25        |
| 20   | 36.5                   | 66.5      | 59.8      | 55.5      | 51.5      | 48.8      | 6-8   | 9-11      | 12-14 | 62        | 55.3      | 28.1      | 61        | 59.8      | 32        | 4.5       | 25.5      | 3.5       | 24        | 31        |
| 30   | 51.5                   | 88.5      | 80.8      | 68.5      | 55.5      | 60.8      | 10-12 | 13-16     | 17-20 | 82        | 74.3      | 42.2      | 82        | 80.8      | 45        | 6.5       | 35.5      | 3.5       | 34        | 46        |
| 40   | 64.5                   | 86.5      | 78.8      | 76.5      | 62.5      | 68.8      | 14-18 | 19-23     | 24-30 | 79        | 71.3      | 52.2      | 80        | 79.6      | 54        | 7.5       | 47        | 3.5       | 41        | 56        |


G: flanges equipped with different clamping pads delivered with the backshells.

# In-line receptacle

In-line male receptacle

In-line female receptacle


Female receptacle

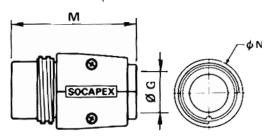


# Receptacle

Male


receptacle







Square flange of receptacle



### Plug and Inline receptacle (backshell sets included)

ROHS Part Numbers: nickel plated or black coated




Non ROHS Part Numbers : clear cadmium plated

| SL series   | SL                               | F | M     | D | 319L |
|---|----------------------------------|---|-------|---|------|
| F: plug or inline re  | ceptacle                         |   |       |   |      |
| Type of contact:<br>M: Male<br>F: Female  |                                  |   |       |   |      |
| D: plug + straight DR: inline receptac<br>C: plug + right and<br>Contact Arrangem | le + straight l<br>Jle backshell |   | shell |   |      |
| 3.  |                                  | , |       |   |      |

### Panel mount receptacle and receptacle with locking ring

ROHS Part Numbers: nickel plated or black coated

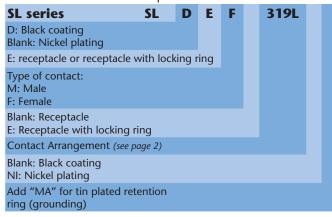

Non ROHS Part Numbers : clear cadmium plated

| SL series                                    | SL         | Е  | F | 319L |
|--|------------|----|---|------|
| E: receptacle or receptation locking ring    | cle with   |    |   |      |
| Type of contact:<br>M: Male<br>F: Female     |            |    |   |      |
| Blank: Receptacle<br>E: Receptacle with lock | ing ring   |    |   |      |
| Contact Arrangement (                        | see page 2 | )  |   |      |
| Add "MA" for tin platering (grounding)       | d retentio | on |   |      |

Comment: Panel gasket is delivered with the receptacle

Comment: Panel gasket is delivered with the receptacle

# **Body of plug and inline receptacle**

With those part numbers the straight and right angle backshells are not included. To define part numbers of backshells, please to consult page 2.

ROHS Part Numbers : nickel plated or black coated

| SL series   | SL     | D | В | M | 319L |
|---|--------|---|---|---|------|
| D: Black coating<br>Blank: Nickel plating           |        |   |   |   |      |
| Body of plug or inline recep                        | otacle |   |   |   |      |
| Type of contact:<br>M: Male<br>F: Female            |        |   |   |   |      |
| Blank: Body of plug<br>R: Body of inline receptacle |        |   |   |   |      |
| Contact Arrangement (see p                          | age 2) |   |   |   |      |
| Blank: Black coating<br>NI: Nickel plating          |        |   |   |   |      |

Non ROHS Part Numbers : clear cadmium plated

|   | or selies               | 3L       | D  | IVI | 2 I A L |
|---|-------------------------|----------|----|-----|---------|
| ı | Body of plug or inline  |          |    |     |         |
| ı | receptacle              |          |    |     |         |
|   | Type of contact:        |          |    |     |         |
|   | M: Male                 |          |    |     |         |
|   | F: Female               |          |    |     |         |
|   | Blank: Plug             |          |    |     |         |
|   | R: inline receptacle    |          |    |     |         |
|   | Contact Arrangement (se | e page 2 | ?) |     |         |
|   |                         |          |    |     |         |

#### Do not hesitate to contact us for further information

#### **Amphenol Socapex**

948, Promenade de l'Arve - BP 29 F - 74311 Thyez Cedex

Tel.: +33 (0) 4 50 89 28 00 - Fax: +33 (0) 4 50 96 29 75 http://www.amphenol-socapex.com